CHEMICAL SYSTEMS LABORATORY

TECHNICAL REPORT ARCSL-TR-83035

DIFFUSION MEASUREMENTS IN MICROEMULSIONS

by

R. A. MacKay

N. S. Dixit

Drexel University, Philadelphia, Pennsylvania

R. Agarwal

Rutgers University, New Brunswick, New Jersey

Reginald P. Seiders

Chemical Branch
Research Division

June 1983

DTIC
ELECTE
OCT 1 9 1983

B

DTIC FILE COPY

AD-A133 801

83 10 17 066

LEAVE DATE AS IS PER MRS. HORSEY,
CSL, 8/584-2914
M. CRUMBACKER - 19 OcT. 83

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Disposition

Destroy this report when no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARCSL-TR-83035	2. GOVT ACCESSION NO. AD-A133 881	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DIFFUSION MEASUREMENTS IN MICROEMULSIONS		5. TYPE OF REPORT & PERIOD COVERED Final Report - September 1982 - December 1983
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) R. A. MacKay R. Agarwal N. S. Dixit Reginald P. Seiders		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander, Chemical Systems Laboratory ATTN: DRDAR-CLB-CA Aberdeen Proving Ground, Maryland 21010		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 1L161102A71A
11. CONTROLLING OFFICE NAME AND ADDRESS Commander, Chemical Systems Laboratory ATTN: DRDAR-CLJ-IR Aberdeen Proving Ground, Maryland 21010		12. REPORT DATE June 1983
		13. NUMBER OF PAGES 23
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE NA

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Diffusion coefficient measurements   Hydrophilic region
Microemulsions   Hydrophobic region
Polarography
Quasielastic light scattering

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Diffusion coefficient measurements in both aqueous micelles and microemulsions have been carried out using the techniques of polarography and quasielastic light scattering (QLS). The former method involves the determination of the diffusion coefficient of an electroactive oil soluble probe at a polarizable microelectrode. For high water content microemulsions, both methods yield the same diffusion coefficients which can be identified as the self diffusion coefficient. For cetyltrimethylammonium bromide (CTAB) micelles, both methods
(Continued on reverse side)

DD FORM 1473   1 JAN 73   EDITION OF 1 NOV 65 IS OBSOLETE

20. ABSTRACT (Contd)

yield the same result at the salt (NaBr) concentration at which the QLS measurements are independent of CTAB concentration. In more concentrated microemulsions, QLS data gave diffusion coefficients in agreement with polarography only for a sodium cetyl sulfate (SCS) system at 65-75 wt % water. For the SCS microemulsions at 60% water, and CTAB microemulsion at 60-75% water, the QLS data yielded rapid, nonexponential decays. However, consistent polarographic diffusion coefficients could still be obtained. By using probes of varying chain length (oil solubility), it has been demonstrated that these CTAB and SCS microemulsions containing butanol and pentanol cosurfactants respectively, are not cosolubilized systems but do contain distinct hydrophilic and hydrophobic regions.

PREFACE

The use of trade names in this report does not constitute an official endorsement or approval of the use of such commercial hardware or software. This report may not be cited for purposes of advertisement.

Reproduction of this document in whole or in part is prohibited except with permission of the Commander, Chemical Systems Laboratory, ATTN: DRDAR-CLJ-IR, Aberdeen Proving Ground, Maryland 21010. However, the Defense Technical Information Center and the National Technical Information Service are authorized to reproduce the document for United States Government purposes.

Acknowledgment

Accession For

NTIS CRA&I

DTIC T.B

Unannounced

Justification

By

Distribution/

Availability Codes

Dist	Avail and/or Special
A	

BLANK

SUMMARY

For oil in water (O/W) microemulsions at high water contents, quasielastic light scattering (QLS) and polarography yield the same values for the translational diffusion coefficient. For more concentrated microemulsions, the interpretation of the QLS data is not straightforward; but, polarography can still yield values of the self diffusion coefficient. In the case of aqueous micelles, a similar situation is obtained. The cetyltrimethylammonium bromide (CTAB) and sodium cetyl sulfate (SCS) microemulsions, containing 1-butanol and 1-pentanol as cosurfactant, respectively, are not cosolubilized systems but do contain distinct hydrophilic and hydrophobic regions. These results, coupled with the simplicity of the polarographic probe method and its lack of dependence on any assumptions, show that it should be added to the arsenal of complimentary measurements which include classical diffusion measurements, QLS, Nuclear Magnetic Resonance (NMR) spin-echo measurements, and sedimentation.

BLANK

CONTENTS

BLANK

DIFFUSION MEASUREMENTS IN MICROEMULSIONS

1. INTRODUCTION

There is a considerable amount of current resea⸱⸱n devoted to the study of the nature of microemulsions. Many of these systems appear to be thermodynamically stable single phases,[1-4] while some are demonstrably kinetically stable.[5-7] Some microemulsions are composed of three components, but the majority of the systems examined to date are composed of at least four components; oil, water, surfactant, and cosurfactant. Usually the cosurfactant is a medium chain length alcohol (e.g., C_4 - C_6). Some of these microemulsions contain droplets of oil in water (O/W) or water in oil (W/O), while the structure of the so-called surfactant or middle phase microemulsions is at present unresolved.[8-10] In addition, some systems contain clear, apparently single phase regions in their pseudo three component phase maps which virtually extend from the water (W) apex to the oil (O) apex,[11] particularly when a lower chain length alcohol such as butanol is employed as the cosurfactant. In these cases, there should be internal structural changes which occur as the clear region is traversed from the W to the O apex, as indicated for example by quasi-elastic light scattering (QLS) studies.[12] However, recent measurements of the diffusion coefficients of the various components of the microemulsion by a Fourier transform pulsed-gradient spin-echo method[13] have not indicated the presence of any sharp boundaries. The diffusion coefficients of oil and water continuously increase and decrease, respectively, as compositions are varied from the W to the O apex. It was suggested that one possible explanation is that these are cosolubilized systems,[10] i.e., molecular dispersions with no distinct hydrophilic and hydrophobic domains.

The properties of microemulsions by a variety of techniques including light scattering,[14] dielectric dispersion,[15] and electrochemistry have been investigated.[16-17] In particular, polarography has been employed to measure the diffusion coefficient of aqueous ions such as Cd(II) and ferricyanide in microemulsions stabilized by both ionic and nonionic surfactants.[18] These studies have demonstrated that the transport of aqueous species is accounted for by the obstruction (effective medium) effect, which indicates that some division into hydrophilic and hydrophobic domains must exist. The polarographic determination of the diffusion coefficient of oil soluble probes, in conjunction with QLS studies, on a variety of microemulsion systems is reported here.

2. EXPERIMENT

2.1 Polarographic Measurements.

As previously described, these measurements were performed at a dropping mercury electrode using a three electrode system.[16,18]

2.2 QLS Measurements.

A fixed angle (90°) laser light scattering photometer (Model LSA-1) from Langley-Ford Instruments was used. The LSA-1 was modified with a Spectra-Physics 15 mw 632.8 nm HeNe laser source, and contained a scattered light collection aperture which defines approximately one coherence area. The autocorrelation functions were computed with a Langley-Ford Model 1096 correlator. The analysis program employs the method of cumulants[19] to fit the correlation function to a single exponential curve directly in the correlator itself, without the use of a separate external computer. Calculations are then performed using the results of the cumulants analysis to yield the average translational diffusion coefficient and subsequently, from the Stokes-Einstein equation, the effective diameter of the particles.

The continuous phase was assumed to have the viscosity and refractive index of pure water unless otherwise indicated. The known dependence of these parameters with temperature was used.[20] To minimize dust incorporation, most samples were filtered through a 0.45 μm filter directly into the cuvet. The samples were then maintained at 25 ± 0.1 C, unless otherwise stated, by means of water circulation around the cuvet from a constant temperature bath.

2.3   Materials.

The materials used in the polarographic experiments have been described elsewhere.[16-18] Sodium dodecyl Sulfate (SDS) (Polysciences, electrophoresis grade) was used as received. Cetyltrimethylammonium bromide (CTAB) (Aldrich, reagent) was twice recrystallized from acetone. n-Octane, hexadecane, and dodecane (99%) were also obtained from Aldrich. Sodium bromide (Fisher, reagent) 1-butanol, and 1-pentanol (B&A, reagent) were used as received.

3.   RESULTS AND DISCUSSION

3.1   Measurement of Diffusion Coefficients.

Some initial results employing an oil soluble electroactive probe, the 1-dodecyl-4-cyanopyridinium ion, were recently reported.[18] If particles composed of hydrophobic material are present in an aqueous continuous medium (e.g., micelles or "oil" droplets), then the diffusion coefficient (D_p) of the electroactive oil soluble probe (determined by means of polarography) should be the diffusion coefficient of the particle. In the absence of interactions between the particles, and assuming they are spheres, the hydrodynamic radius (r_p) can be determined from the Stokes Einstein equation (1), where

$$r_p = kT/6\pi n D_p \tag{1}$$

n is the viscosity of the continuous medium, and k and T are Boltzman's constant and the absolute temperature respectively. If the spheres are polydisperse, the measured value of D will depend upon the size distribution as well as the distribution of probe among the particles. However, it might be expected that the probe distributes itself according to either the volume or surface area of the particle, and in either case the larger particles would be heavily weighted.

For the QLS measurements, monodisperse particles give rise to an auto-correlation function which decays exponentially with a (1/e) decay time $\tau = \Gamma^{-1}$. The diffusion coefficient (D_z) of the particle is given by ΓK^{-2}, where $K = (4\pi n/\lambda) \sin \theta/2$. Here λ, θ, and n are the laser wavelength, scattering angle, and refractive index of the continuous medium respectively. If the particles are spheres, a hydrodynamic radius r_z can be calculated using equation (1). For monodisperse particles, providing that the presence of the probe does not effect the particle size, D_z and D_p should be equal. For polydisperse particles, D_z is the z - average diffusion coefficient which is even more heavily weighted in favor of the larger particles than D_p. In general, if $\bar{D}$ is the number average value, then $\bar{D} \geq D_p \geq D_z$. The variance obtained from the QLS data analysis is a measure of the polydispersity. As a rule of thumb, variances less than 0.1 will be considered to be reasonably monodisperse.

If the phase volume ϕ (i.e., particle concentration) is high and/or the particles are interacting, then both D_p and D_z are not necessarily the "free particle" diffusion coefficient. Polarography might be expected to yield the self or trace diffusion coefficient, while QLS may yield a self diffusion coefficient, a collective diffusion coefficient, or non-exponential behavior to which both contribute.[21]

3.2   Comparison of D_p and D_z.

In order to examine the validity of the polarographic probe method, values of D_p (or r_p) have been compared with values of D_z (or r_z) obtained by QLS on both high water-content microemulsions and micelles. Values of D_z for octane/water (aqueous NaBr) microemulsions stabilized by CTAB and 1-butanol have been reported.[22] D_p has been measured in this system and the results are presented in table 1. The agreement is excellent. The variance reported for the QLS measurements is ≤ 0.04, indicating that the droplets are essentially monodisperse.

Table 1.   Values of the Polarographic (D_p) and QLS (D_z) Diffusion
Coefficients at 25°C in an Octane/CTAB/1-Butanol/Water
Microemulsion[a]

% NaBr[b]	D_p[c,d]	D_z[c,e]
1.3	2.3	2.3
1.5	1.3	1.6
1.6	1.1	1.1
1.7	0.8	0.8

[a] composition given in reference 22.

[b] by weight.

[c] $cm^2/s \times 10^7$.

[d] using the probe 1-dodecyl-4-cyano pyridinium iodide at a concentration of 0.6 mM.

[e] estimated from figure 1, reference 22.

For CTAB micelles, QLS studies were reported as a function of temperature, CTAB, and NaBr concentration.[23] At NaBr concentration < 0.08 M, D_z increased with increasing CTAB concentration. It was concluded however that this was principally due to intermicellar interactions rather than to a change in size. At NaBr concentrations > 0.08 M, D_z actually decreased with increasing CTAB concentration. We have chosen a CTAB concentration (0.04 M) at which D_z varies substantially with NaBr concentration, and have measured D_p under the same conditons. The results are given in table 2.

The absolute agreement is not as good, but the same trend is certainly observed. The expected order (for a dilute polydispersion) of $D_p \geq D_z$ is observed for NaBr concentrations > 0.08 M, but the reverse is observed at [NaBr] < 0.08 M. Interestingly, $D_p = D_z$ within experimental error ($\pm$ 10% on D_p) at [NaBr] = 0.08 M, the concentration at which D_z is not a function of CTAB concentration. These results may also reflect the notion that D_z is more a measure of the collective motion at these concentrations under the experimental QLS conditions employed,[23] while D_p should more closely resemble a self diffusion coefficient . Table 3 presents some values of D_p obtained at low CTAB and salt (KCl) concentration at 25°C. These concentrations of CTAB are only 2-7 times the critical micelle concentration (cmc) of CTAB ($\approx$0.7 mM), and could also be influenced by the pyridinium probe (0.22 mM). However, these D_p values agree very well with the value of $D_z \approx 8 \times 10^{-7}$ cm^2/s for CTAB micelles near the cmc.[23,24]
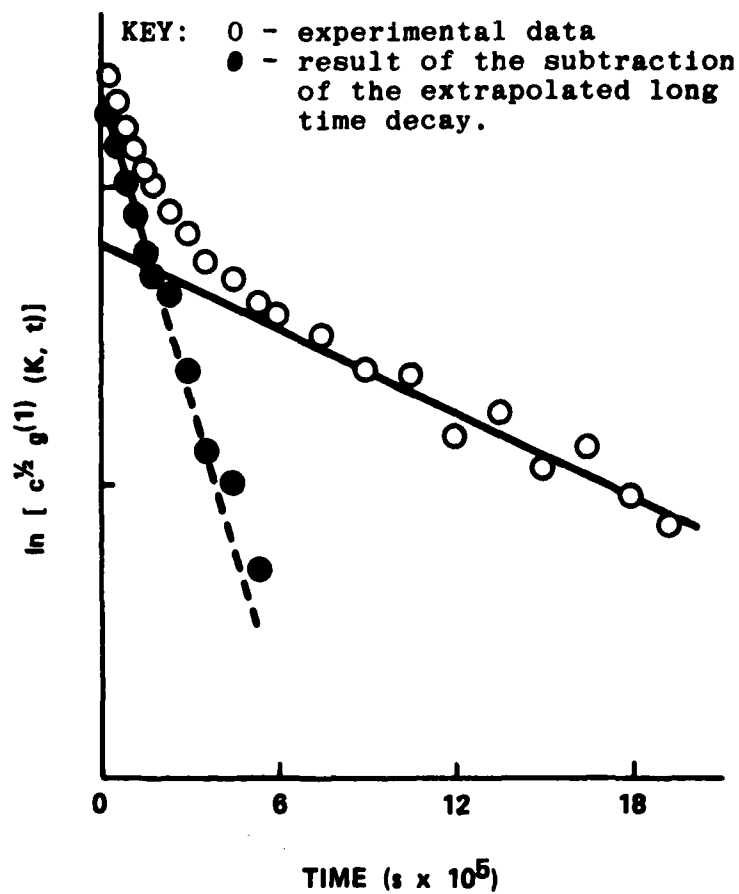
11

Figure 1. Auto Correlation Function for the 60% Water
SCS Microemulsion *vide text*

Table 2. Values of the Polarography (D_p) and QLS (D_z)
Diffusion Coefficients at 40°C in Aqueous CTAB
(0.04 M) as a Function of NaBr Concentration.

[NaBr][a]	D_p[b,c]	D_z[b,d]	r_p[e]
0.00	15.0	-	23
0.02	15.0	21.0	24
0.05	12.0	14.0	29
0.08	9.9	11.0	36
0.10	6.6	4.4	54
0.20	4.3	2.4	82

[a] moles dm^{-3}

[b] $cm^2/s \times 10^7$

[c] using 0.49 mM 1-dodecyl-4-cyano pyridinium iodide as
the probe

[d] estimated from figure 2, reference 23

[e] calculated from equation (i) using the viscosity of
water at 40°C (0.65 cp)

Table 3. Polarographic Diffusion Coefficients (D_p)
for Aqueous CTAB Solutions at 25°C.

[CTAB][a]	[KCl][a]	D_p[b]	r_p[c]
1.51	0.12	7.7	32
	0.29	7.7	32
	0.60	8.2	30
3.52	0.29	9.7	26
4.53	0.37	9.3	27

[a] mM

[b] using 1-dodecyl-4-cyanopyridinium iodide (0.22 mM) D_p
in $cm^2/s \times 10^7$

[c] from equation (i), using the viscosity of water at
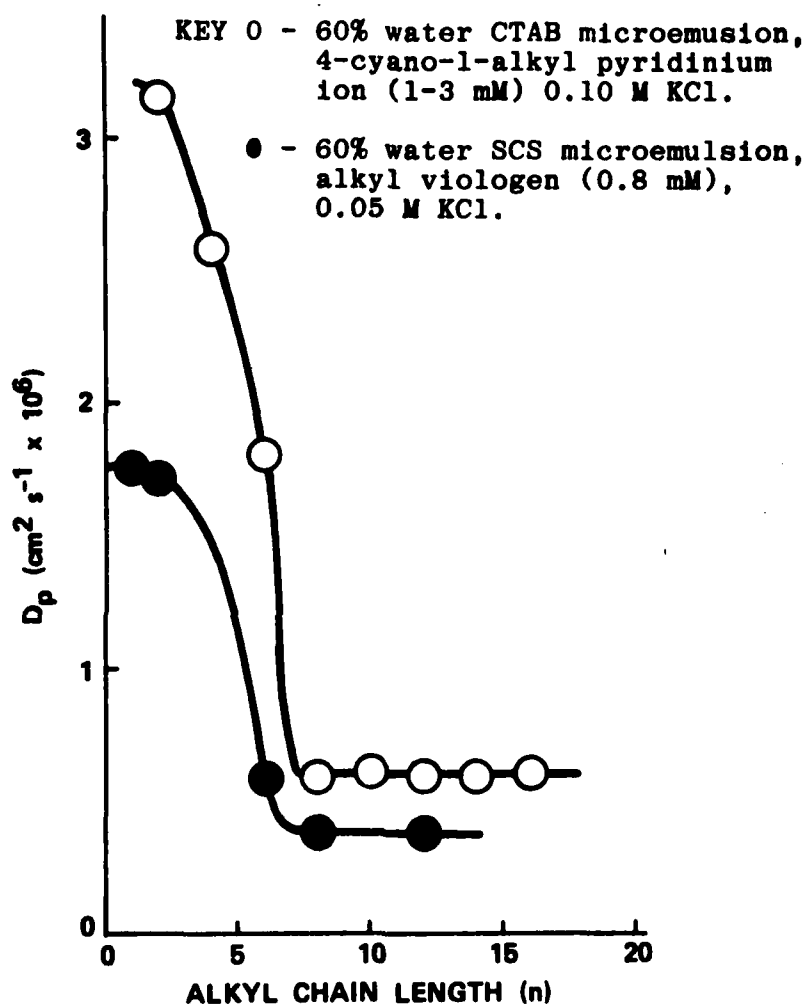25°C (0.89 cp) r_p in Å

Figure 2. Polarographic Diffusion Coefficient (D_p)
Versus Alkyl Chain Length at 25°C

We have also determined the value of D_p for two-dodecane-in-water micro-emulsions stabilized by SDS and 1-pentanol. In these cases, droplet radii (r_f) were determined by fluorescence methods, one involving pyrene excimer formation[25] and the other the quenching of ruthenium (II) trisbypyridyl emission by 9-methylanthracene.[26] The former system is composed of 0.5 M SDS, 1.0 M 1-pentanol, and 9 vol % of dodecane (approximately 70% water by weight), and a radius of 40 Å was reported. Using the pyridinium probe, $D_p = 6.04 \times 10^{-7}$ cm^2/sat 25°C. Employing the viscosity of *pure water* in equation (1), $r_p = 41$ Å. This latter system is composed by weight of *ca.* 5.5% SDS, 5.1% dodecane, 10.3% 1-pentanol, and 79.1% water, with $r_f = 37$ Å. We obtain $D_p = 6.3_5 \times 10^{-7}$ cm^2/s, and again using the viscosity of water, $r_p = 37$ Å.

It is clear from these results that the polarographic determination of diffusion coefficients using an oil soluble probe yields usable values of D_p which are comparable to those obtained by the other methods, particularly QLS. Naturally, the probe itself must be completely sorbed by the particle and not influence its size. In the case of micelles, caution must be exercised. However, in the case of micro-emulsions with their higher phase volumes, the probe apparently causes no significant perturbations at mM concentrations. It may also be noted that a knowledge of the refractive index of the continuous phase is needed in order to obtain D_z from QLS, while no physical property of the microemulsion is needed to obtain D_p at a dropping mercury electrode. Even if a rotating solid microelectrode is used (e.g., platinum or glassy carbon), only the *bulk* kinematic viscosity of the microemulsion is needed. This is easily measured, and involves no assumptions as to the actual composition of the continuous "phase." This can present some difficulty when performing QLS measurements on microemulsions with low water content.

3.3 Anionic and Cationic Microemulsions

A number of studies employing microemulsions stabilized by CTAB or SCS have been previously reported. Pseudo three *component phase maps* of a CTAB/1-butanol/hexadecane/water[1b] and a SCS/1-pentanol/mineral oil/water[18] microemulsion are available. The three "components" are the surfactant/alcohol mixture in a fixed ratio, termed the emulsifier (E), the oil (O) and water (W). We have carried out the QLS measurements at selected water dilutions along lines running from *ca.* 10% O, 90% E (CTAB) and 20% O, 80% E (SCS) by weight, to the W apex. These results are summarized in table 4. The QLS data consist of very rapid nonexponential decays for the CTAB microemulsion from 60-75 wt % water, and the SCS microemulsion at 60% water. Very different and considerably larger values of the diameter are obtained from polarography. One possibility is that the QLS data are representing a collective diffusion coefficient (D_c) or some combination of D_c and the self diffusion coefficient (D_s). A second possibility is that these microemulsions are either cosolubilized (i.e., molecular dispersions) or contain only rapidly fluctuating small aggregates.[13] However, in the SCS microemulsion at 66% and 73% water, a double exponential decay was observed. After substraction of the baseline, the data were resolved graphically as shown in figure 1. If the nonexponential behavior is due to polydispersity, then the long term decay can be attributed to D_s.[21] This is consistent with the polarographic data with $D_p > D_z$ ($r_p < r_z$), discussed earlier. The same is true at 73% water. The short term decay then represents D_c where $D_c \gg D_s$ as expected. It may also be noted that the polarographic diameter of 117 Å at 60% water in the SCS microemulsion compares favorably with a value of *ca.* 100 A obtained from low angle X-ray scattering.[18]

15

Table 4. Summary of QLS and Polarographic Results on
CTAB and SCS Microemulsions at 25°C *vide text*

Microemulsion	wt % water	d_z (A)[a]	d_p (A)[d]
CTAB	60	18[b]–26	68
	65	22[b]–34	73
	75	17[b]	125
SCS	60	51–64[b]	117
	66	21 }[c] 153	132[e]
	73	17 }[c] 351	332[f]

a diameter, determined using the refractive index (1.33) and
  viscosity (0.89 cp) of pure water
b polydispersity index (variance) > 0.1
c obtained from a graphical analysis of the QLS data *vide text*
d from polarography, using equation (i) and the viscosity of water
e 65% water, 0.05 M KCl
f estimated from data at 75% H_2O, 0.05 M KCl and 80% water, 0.00
  and 0.05 M KCl. Above 65% water, salt causes a decrease in r_p
  in the SCS microemulsion.

Finally, some polarographic data are presented which bear on the possibility,
raised above, that some of these microemulsion compositions represent colsolubilized
systems. We have determined the value of D_p for both 4-cyano-1-alkyl pyridinium ion
and alkyl viologen as a function of the alkyl chain length (n). The long chain de-
rivatives are insoluble in water, while the short chain derivatives are quite soluble.[27]
In the former case, the probe should be completely solubilized in the "oily" aggre-
gate, if such exists. In fact, both the C_{12} pyridinium and viologen probes yield the
same value of D_p in the 60% water SCS microemulsion within experimental error. If no
distinct hydrophilic and hydrophobic regions exist, then all chain lengths should
give approximately the same value of D_p. This is clearly not the case, as shown in
figure 2. For n = 1 or 2, the probe is apparently "free"; i.e., solubilized in the
"aqueous" continuous phase. The value for 4-cyano-1-ethyl pyridinium ion in CTAB
microemulsion is in reasonable agreement with that estimated from the value in water
and the phase volume.[28]* It appears that this data is good evidence for the exist-
ence of distinct oil and water regions. The probes themselves do not micellize and
their presence at the concentrations employed in the polarographic measurements has
no effect on the QLS results. The values of D_p are also unaffected by probe concen-
tration.

---

* The value of the diffusion coefficient of 1-ethyl-4-cyanopyridinium ion in water
  (D_o) is 9.1×10^{-6} cm²/s. The observed value of the diffusion coefficient (D), if
  solubilized only in the aqueous phase, is given by $D = D_o(1-\phi')^{1.5}$, where ϕ' is
  the actual phase volume (including bound water) occupied by the "oil" drops. For
  the CTAB microemulsion at 60% water, $\phi' = 0.55 \pm 0.05$, and thus $D - 2.7 \pm 0.5 \times 10^{-6}$
  cm²/s, is in good agreement with the polarographic value of 3.2×10^{-6} cm²/s
  (see figure 2 in this report).

LITERATURE CITED

1.   Reed, R. L., and Nealy, R. W. Improved Oil Recovery by Surfactant and Polymer Flooding. Academic Press, New York. 1977.

2.   Hermansky, C., and MacKay, R. A. Solution Chemistry of Surfactants, pp 723-730. K. L. Mittal, Ed. Plenum Press, New York. 1979.

3.   Shinoda, K., and Friberg, S. Adv. Coll. Int. Sci. *4*, 281 (1978).

4.   MacKay, R. A. Adv. Coll. Int. Sci. *15*, 131 (1981).

5.   Clausse, M., Sherman, P., and Sheppard, R. J. Dielectric Properties of Benzene-in-Water Microemulsions in the Frequency Range 100 kHz - 5 MHz. J. Coll. Int. Sci. *56*, 123 (1976).

6.   Gerbacia, W., and Rosano, H. L. Microemulsions: Formation and Stabilization. J. Coll. Int. Sci. *44*, 242 (1973).

7.   Rosano, H. L., Lan, T., Weiss, A., Gerbacia, W.E.F., and Whittam, J. H. Transparent Dispersions: An Investigation of Some of the Variables Affecting Their Formation. J. Coll. Int. Sci. *72*, 233 (1979).

8.   Scriven, L. Micellization, Solubilization and Microemulsion. Vol 2. p. 877. K. L. Mittal, Ed. Plenum Press, New York. 1977.

9.   Friberg, S., Lapczynska, I., and Gillberg, G. Microemulsions Containing Nonionic Surfactants - The Importance of the PIT Value. J. Coll. Int. Sci. *56*, ·19 (1976).

10.   Shah, D. O., Walker, R. D., Jr., Hsieh, W. C., Shah, N. J., Divivechi, S., Nelander, J., Pexinsky, R., and Deamer, D. W. Improved Oil Recovery Symposium of Soc. Pet. Eng. AIME. SPE 5815. March 1976.

11.   Bellocq, A. M., Biais, J., Clin, B., Gelot, A., Lalanne, P., and Lemanceau, B. Three-Dimensional Phase Diagram of the Brine-Toluene-Butanol-Sodium Dodecyl Sulfate System. J. Coll. Int. Sci. *74*, 311 (1980).

12.   Biais, J., Botharel, P., Clin, B., and Lalanne, P. Theoretical Behavior of Microemulsions: Geometrical Aspects, Dilution Properties and Role of Alcohol. Comparison and Experimental Results. J. of Dispersion Sci. Tech. *2*, 67 (1981).

13.   Lindman, B., Stilbs, P., and Moseley, M. E. Fourier Transform NMR Self-Diffusion and Microemulsion Structure. J. Coll. Int. Sci. *83*, 569 (1981).

14.   Hermansky, C., and MacKay, R. A. Light Scattering Measurements in Nonionic Microemulsions. J. Coll. Int. Sci. *73*, 324 (1980).

15.   Foster, K. R., Epstein, B. R., Jennin, P. C., and MacKay, R. A. Dielectric Studies on Nonionic Microemulsions. J. Coll. Int. Sci. *88*, 233 (1982).

16.   MacKay, R. A., Hermansky, C., and Agarwal, R., Electrochemical Measurements in Nonionic Microemulsions. J. Coll. Int. Sci. II, 289-303. M. Kerker, Ed. Academic Press, New York (1976).

17. MacKay, R. A., Dixit, N. S., and Agarwal, R. Inorganic Reactions in Organized Media, pp 179-194. ACS Symposium Series No. 177, S. L. Holt, Ed. 1982.

18. MacKay, R. A. Microemulsions, pp 207-219. J. D. Robb, Ed. Plenum Press. 1982.

19. Chu, B. Laser Light Scattering. Academic Press, New York. 1974.

20. CRC Handbook of Chemistry and Physics. 58th Ed, pp F-51 and E-223. CRC Press, Inc., Cleveland, Ohio. 1977.

21. Pusey, P. N., and Tough, R. J. A. Adv. Coll. Int. Sci. *16*, 143 (1982).

22. Nicoli, D. F., DeBuzzaccarini, F., Romsted, L. S., and Bunton, C. A. Measurement of the Correlation Radius in Oil-in-Water Microemulsions by Dynamic Light Scattering. Chem. Phys. Lett. *80*, 422 (1981).

23. Dorshow, R., Brigg, J., Bunton, C. A., and Nicoli, D. F. Dynamic Light Scattering From Cetyltrimethylammonium Bromide Micelles: Intermicellar Interactions at Low Ionic Strengths. J. Phys. Chem. *86*, 2388 (1982).

24. Briggs, J., Dorshow, R. B., Bunton, C. A., and Nicoli, D. F. Diffusion of Interacting Micelles: A General Treatment at Low Salt Concentrations. J. Chem. Phys. *76*, 775 (1982).

25. Lianos, P., Lang, J., Strazielle, C., and Zana, R. Fluorescence Probe Study of Oil-in-Water Microemulsions. 1. Effect of Pentanol and Dodecane or Toluene on Some Properties of Sodium Dodecyl Sulfate Micelles. J. Phys. Chem. *86*, 1019 (1982).

26. Almgren, M., Grieser, F., and Thomas, J. K. Photochemical and Photophysical Studies of Organized Assemblies. Interaction of Oils, Long Chain Alcohols, and Surfactant Forming Microemulsions. J. Am. Chem. Soc. *102*, 3188 (1980).

27. MacKay, R. A., Letts, K., and Jones, C. Micellization, Solubilization and Microemulsions, Vol. 2. Interactions and Reactions in Microemulsions. pp. 801-816. K. L. Mittal, Ed. Plenum Press, New York. 1977.

28. Epstein, B. R. University of Pennsylvania. Dissertation. 1982.

DAT
FILM